
Online NS0-175 Test Brain Dump Question and Test Engine [Q150-Q165

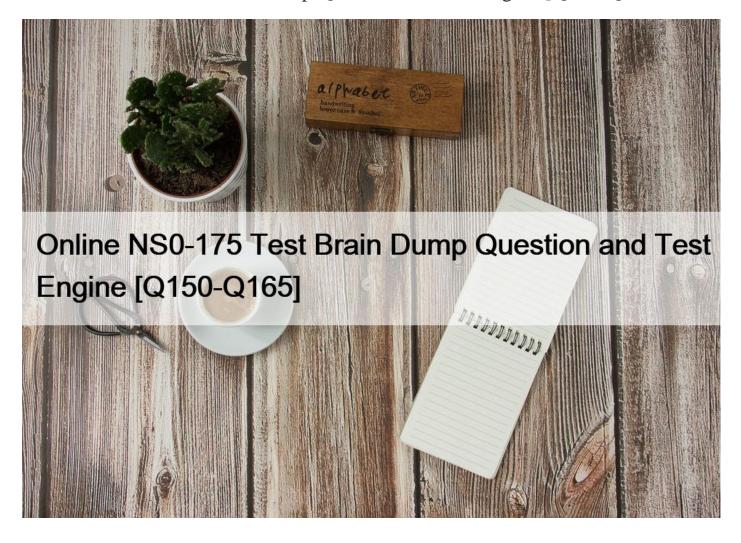

Online NS0-175 Test Brain Dump Question and Test Engine Real Network Appliance NS0-175 Exam Dumps with Correct 277 Questions and Answers

NetApp NS0-175 Exam Topics: SectionObjectivesSecurity- Describe access control methods for FlexPod solutions

- Describe the considerations in building a secure multitenancy designNetworking- Describe Cisco networking components used within FlexPod designs
- Demonstrate knowledge of FlexPod networking configurationsTools- Describe resources for determining supported FlexPod components
- Demonstrate knowledge of using tools for managing FlexPod
- Demonstrate knowledge of troubleshooting methodologies for FlexPod solutionsFlexpod Design- Describe FlexPod components based upon customer workloads

- Describe how to size a solution based on customer requirements in accordance with FlexPod best practices
- Describe the support options for FlexPod

NO.150 State whether the following statement is true or false. The sysstat command allows the performance statistics to be viewed, which consists of the present CPU usage, the full amount of network I/O, and the amount of disk I/O.


- * False
- * True

NO.151 You are working with a customer on a new FlexPod solution. The customer advises you that they want a single point of contact for support issues.

In this scenario, which two support solutions should you offer the customer? (Choose two.)

- * Cisco SmartNet Total Care
- * NetApp SupportEdge Expert
- * NetApp Solution Support for FlexPod
- * Cisco Solution Support

NO.152 Exhibit 1:

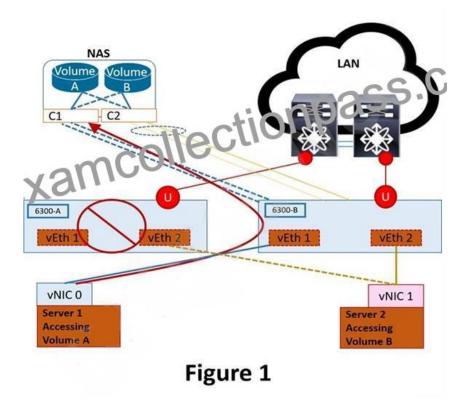





Figure 2

Exhibit 2:

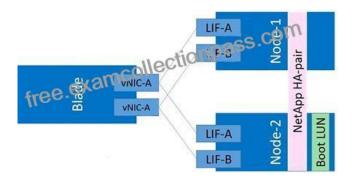

Referring to the exhibit, UCS Fabric Interconnect 6300-A fails as shown in Figure 1. Due to the storage LIF configuration, after UCS Fabric Interconnect 6300-A is restored, traffic flows as shown in Figure 2.

To enable this capability, on which two UCS port types should storage VLANs be accessible? (Choose two.)

- * uplink ports
- * appliance ports
- * fabric ports
- * switch ports

NO.153 A customer with a FlexPod Express solution wants to enable remote access to the NetApp storage component.

In this scenario, which two access methods are recommended? (Choose two.)

- * Telnet
- * SAML
- * SSH
- * RDP

NO.154 To add a user to the appliance database, you must enter the _____ and the _____.

Export date: Wed Nov 27 22:35:54 2024 / +0000 GMT

- * user name
- * access permissions
- * password
- * group

NO.155 State whether the following statement is true or false. All defective parts require a RMA before to sending the product to Network Appliance.

- * False
- * True

NO.156 A customer wants a FlexPod solution that is designed for high performance applications and that will support

32 Gbps Fibre Channel block storage.

In this scenario, which two components should you recommend to the customer? (Choose two.)

- * NetApp AFF C190
- * NetApp AFF A800
- * Cisco Nexus 93180YC-FX
- * Cisco Nexus 9504

NO.157 Under what circumstance can a Cisco Nexus 5548 perform an ISSU (nondisruptive)?

- * When configured for VPCs
- * When configured for L3
- * When an STP-enabled switch is connected downstream
- * When the STP Bridge Assurance feature is running on a link other than the VPC peer link.

NO.158 Which two features are supported with vSphere 6 Standard edition? (Choose two.)

- * vCenter Site Recovery Manager
- * thin provisioning
- * Storage vMotion
- * Storage DRS

NO.159 A customer has configured a FlexPod solution and is experiencing issues with connectivity from the Cisco Nexus switches to the NetApp AFF controllers. The customer must verify connectivity using the FC protocol.

What are two ways to troubleshoot this problem? (Choose two.)

- * Use the WWNN
- * Use the WWPN
- * Use the FCID
- * Use Domain ID

NO.160 Which of the following options best describes what the configure "Shared User Hosts" feature that is found under Appliance Manager's Setup > FTP > Caching Behavior is used for?

- * a shared IP address that all requesting clients will use to circumvent any authentication or user-specific key requirements on the backend FTP servers
- * FTP servers from which fetched objects will be cached and served without a user-specific key requirement in order to increase the caching efficiency
- * a subset of FTP servers that will be accelerated by the NetCache appliance
- * a subset of FTP servers that can be bound to a shared virtual IP address in order to increase overall caching efficiency

NO.161 The storage administrator must change the vHBA settings bound to a template associated with a production server.

What happens when the settings are reconfigured in this scenario?

- * The vHBA configuration change does not affect LUN access.
- * The server that is associated with the service profile reboots.
- * The service profile template that is associated with the server is initialized.
- * The vHBA template is deleted from UCS Manager.

NO.162 According to FlexPod CVDs, what is the recommended MTU size for iSCSI logical interfaces (LIFs) on the NetApp Storage Virtual Machine (SVM)?

- * 1,500
- * 3,000
- * 9,000
- * 9,124

NO.163 What are the two expected outputs of network interface show? (Choose two.)

- * IP addresses of NAS and iSCSI logical interfaces
- * iSCSI IQNs
- * Namespace of SAN logical interfaces
- * System WW node name
- * WW port names of Fibre Channel and FCoE logical interfaces

NO.164 VMware vCenter Server Appliance v6.0 supports which two types of databases? (Choose two.)

- * MySQL 5.7
- * Oracle 12c
- * SOL Server 2016
- * vPostgres

NO.165 Which port type would you configure when you connect a chassis to the Fabric Interconnects?

- * Fibre Channel storage ports
- * server ports
- * appliance ports
- * Ethernet uplink ports

Valid NS0-175 Test Answers & Network Appliance NS0-175 Exam PDF:

https://www.examcollectionpass.com/NetworkAppliance/NS0-175-practice-exam-dumps.html]