
## SAP Certified Development Associate C\_HCDEV\_01 Dumps Full Questions with Free PDF Questions to Pass [Q48-Q71

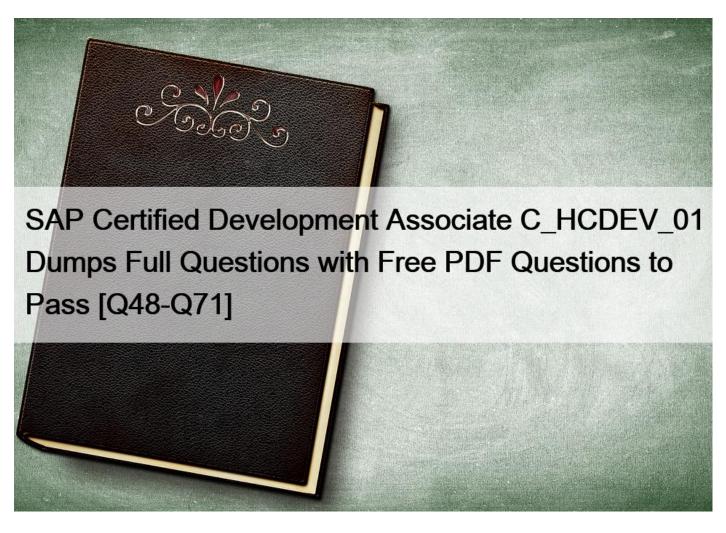

SAP Certified Development Associate C\_HCDEV\_01 Dumps Full Questions with Free PDF Questions to Pass 100% Updated SAP C\_HCDEV\_01 Enterprise PDF Dumps

**NO.48** According to the golden path for the SAP Cloud Application Programming Model, what does the framework do when you add custom logic?Note: There are 2 correct Answers to this question.

- \* Parse output.
- \* Include tenant isolation.
- \* Serialize inputs.
- \* Handle database connections.

**NO.49** You are using Core Data Services (CDS) to define the persistence layer in SAP Business Application Studio. Which folder of the project do you use to create the design time files?

- \* srv
- \* db
- \* src

\* web

NO.50 Why might you use the .on option to hook event handlers to a service? Note: There are 2 correct Answers to this question.

- \* To override generic handler execution
- \* To complement the framework code execution
- \* To add checks to the generic handler execution
- \* To deal with an external service

NO.51 How do you control the flow of logic when using SQLScript? Note: There are 3 correct Answers to this question.

- \* By using WHILE loops
- \* By branching logic based on some conditions
- \* By using SELECT statements
- \* By manipulating scalar variables
- \* By using GRANT or REVOKE statements

NO.52 What does the service document of an OData service list? Note: There are 3 correct Answers to this question.

- \* Singletons
- \* Entity sets
- \* Functions
- \* Actions
- \* Types

**NO.53** You want to implement an event handler to show a console log once a supplier record is read. What is the correct syntax to implement this?

- \* const cds = require('@sap/cds')module.exports = cds.service.impl(function () { const {Supplier} = this.entities() this.after('each',Supplier, row =>{ console.log(`Read Supplier: \${row.ID}`)})})
- \* const cds = require('@sap/cds')module.exports = cds.service.impl(function () { const {Supplier} = this.entities() this.after('each',Supplier, row =>{ output.log(`Read Supplier: \${row.ID}`)})})
- \* const cds = require('@sap/cds')module.exports = cds.service.impl(function () { const {Supplier} = this.entities()this.on('each',Supplier, row =>{ output.log(`Read Supplier: \${row.ID}`)})})
- \* const cds = require('@sap/cds')module.exports = cds.service.impl(function () { const {Supplier} = this.entities() this.on('each',Supplier, row =>{ console.log(`Read Supplier: \${row.ID}`) })})

NO.54 Which method can you use to collect error messages with high severity and return them to the caller in the request-response?

- \* req.reply
- \* req.reject
- \* req.notify
- \* req.error

**NO.55** Which database features are typically NOT required by analytical applications that run on SAP HANA Cloud?Note: There are 2 correct Answers to this question.

- \* Pre-calculated aggregates
- \* Indexes
- \* Stored procedures
- \* Table partitions

NO.56 Which sequence of steps do you follow when working with files locally in Git in SAP Business Application Studio?

- \* (a)Check out (b)Create, modify, save(c)Stage(d)Commit(e)Stage
- \* (a)Create, modify, save(b)Check out(c)Commit(d)Stage
- \* (a)Create, modify, save(b)Commit (c)Check out

\* (a)Create, modify, save(b)Stage(c)Check out (e)Commit

NO.57 In a SQLScript procedure, which feature can you use to initialize IN/OUT table parameters?

- \* SET
- \* IS\_EMPTY
- \* DEFAULT EMPTY
- \* DEFAULT

**NO.58** A new release of SAP HANA Cloud, SAP HANA database is available as of today. If you do NOT perform the upgrade manually, how much time do you have before your database will be automatically upgraded to the next release?

- \* 3 months
- \* 7 months
- \* 2 weeks
- \* 1 year

**NO.59** What does the SAP Cloud Application Programming Model provide to enhance cloud-native technologies? Note: There are 3 correct Answers to this question.

- \* Data access layers
- \* Destination service
- \* (Generic) service providers
- \* Service SDKs
- \* Cloud Foundry service

NO.60 Which resource types can you use in an mta.yaml file? Note: There are 3 correct Answers to this question.

- \* com.sap.xs.pgp
- \* com.sap.xs.uaa
- \* com.sap.xs.hdi-container
- \* com.sap.xs.web
- \* com.sap.xs.hana-sbss

**NO.61** You are using Git in SAP Business Application Studio for version control. You have initialized Git and would like to include the files in your new local repository. What command do you use?

- \* git add
- \* git commit
- \* git push
- \* git init

**NO.62** You have to create an association between Books and Authors entities using Core Data Services (CDS). Which syntax is applicable?

\* entity Books { key ID : Integer; title : String; author : Association to Authors;} Authors { key ID :

Integer;name : String;}

\* entity Books {key ID : Integer;title : String; author : Association to Authors;entity Authors {key ID :

Integer; name : String;}}

\* entity Books {key ID : Integer; title : String; author : Association to entity Authors { key ID :

Integer;name : String;} ;}

\* entity Books { key ID : Integer; title : String; author : Association to Authors; } entity Authors { key ID :

Integer;name : String;}

**NO.63** Which of the following types of data model can you develop with SAP HANA Cloud? Note: There are 3 correct Answers to this question.

- \* Semantic
- \* Spatial
- \* Graph
- \* Composite
- \* Predictive

**NO.64** Which request headers values are passed when the scheduler invokes the endpoint? Note: There are 2 correct Answers to this question.

- \* req.headers.connection
- \* x-sap-job-id
- \* req.headers.authorization
- \* x-sap-job-schedule-id

**NO.65** Which aspect of model reuse can you use to add both Created by/Created at and Changed by/Changed as information for records?

- \* managed
- \* temporal
- \* localized
- \* cuid

NO.66 Which Node.js module do you use to run an SQL statement against the SAP HANA database?

- \* @sap/xssec
- \* @sap/xsenv
- \* @sap/hdbext
- \* @sap/hdi

NO.67 What is contained within the Application part of the index.html?

- \* Service references
- \* Primary UI anchor
- \* Initial construction
- \* Configurations of files to be loaded

**NO.68** You are executing a job using the SAP Job Scheduling service in asynchronous mode. Which HTTP status code does the application return as acknowledgement response?

- \* 201- CREATED
- \* 200- OK
- \* 204- NO CONTENT
- \* 202- ACCEPTED

**NO.69** Which actions are executed in Cloud Foundry under the Deploy & Execute phase when you run an application? Note: There are 3 correct Answers to this question.

- \* Copy the application image to the BLOB store.
- \* Release the application and provide the metadata information.
- \* Execute service wiring to dependent services.
- \* Download required libraries/dependencies.
- \* Start a new container with the application image.

This page was exported from -  $\underline{Free\ Exam\ Dumps\ Collection}$  Export date: Sat Apr 12 9:11:14 2025 / +0000 GMT

NO.70	Which	package	can	you	use to	read	bound	services'
-------	-------	---------	-----	-----	--------	------	-------	-----------

- \* @sap/xsenv
- \* @sap/xssec
- \* @sap/hdi
- \* @sap/hdbext

NO.71 What is mandatory when working on public Git in a distributed environment?

- \* Connect to a central repository to share your project contribution.
- \* Keep the entire history of your project locally.
- \* Buy the software license on the Git website.
- \* Block the piece of code you are working on in the central repository.

Use Valid Exam C\_HCDEV\_01 by ExamcollectionPass Books For Free Website: https://www.examcollectionpass.com/SAP/C\_HCDEV\_01-practice-exam-dumps.html]