

Exam Dumps OMS-435 Practice Free Latest Salesforce Practice Tests [Q36-Q54]



Exam Dumps OMS-435 Practice Free Latest Salesforce Practice Tests
OMS-435 Exam Questions | Real OMS-435 Practice Dumps

NO.36 A developer needs to change some field labels on a FlexCard. The FlexCard is currently deployed to production. The developer that the best course of action is to version the FlexCard rather than cloning it.

Which factor would lead the developer to this decision?

- * The new version of the FlexCard will be used in a new Console, and the current version of the FlexCard should remain unchanged.
- * Another team member is developing new action, fields and styling for the current version of the FlexCard.
- * The new and current versions will be displayed together on the same target.
- * All instance of the FlexCard must be updated with the changes.

NO.37 A developer is configuring a DataRaptor Load to Save contract dat

a. The developer needs to set the record type of the contact using DeveloperName.

Which two configuration actions should the developer take to set this up in the DataRaptor Load?

- * Check is Lookup property when mapping the fields.
- * Add Link to RecordType object in the Contact Object with the id field of RecordType object.
- * Select RecordType in the Lookup object list. Development in the lookup Field list, and ID in the Lookup Requested Field list.
- * Select RecordType in the Lookup Object list. ID in the Lookup Field list, and Development in the Lookup requested Field list.

NO.38 A developer needs to configure a calculation procedure to calculate the sum of the entire Baseprice.

What is the most efficient way for the developer to meet this requirement?

- * Create a Postprocessor apex class to calculate the sum.
- * Add an Aggregation Step as SUM (BasePrice)
- * Add A Calculation Step as SUM (BasePrice).
- * Create a Preprocessor class to calculate the sum

NO.39 A)

```
"Steps": {  
  "Block1": {  
    "Text1": "Text",  
    "Block2": {  
      "Telephone1": "1234567890",  
      "Checkbox1": false  
    }  
  },  
  "Block3": {  
    "Multi-select1": "Value A;Value B"  
  }  
}
```

B)

```
"Steps": {  
  "Block1": {  
    "Text1": "Text",  
    "Telephone1": "1234567890",  
    "Checkbox1": false  
  }  
  "Block3": {  
    "Multi-select1": "Value A;Value B"  
  }  
}
```

- * Option A
- * Option B

NO.40 What should a developer's first step be when troubleshooting whether a DataRaptor Extract is retrieving data?

- * Go to the Lightning Console and reload the page to test.
- * Go to the PREVIEW tab In OmniScript to test.
- * Deactivate the card and layout, and go to the PREVIEW tab for the card to test.
- * Add a key/value pair in the DataRaptor to test it.

NO.41 When launching an OmniScript from an action on a FlexCard, the OmniScript displays, but no Salesforce data is populated:


Which two errors could cause this behavior?

Choose 2 answers

Choose 2 answers

- * The Id Field for Actions in the FlexCard is blank.
- * There is no active version of the Data Raptor Extract.
- * There is no active version of the OmniScript
- * In the DataRaptor Extract Action, the Input Parameters Filter Value is misspelled.

NO.42 Refer to the exhibit.

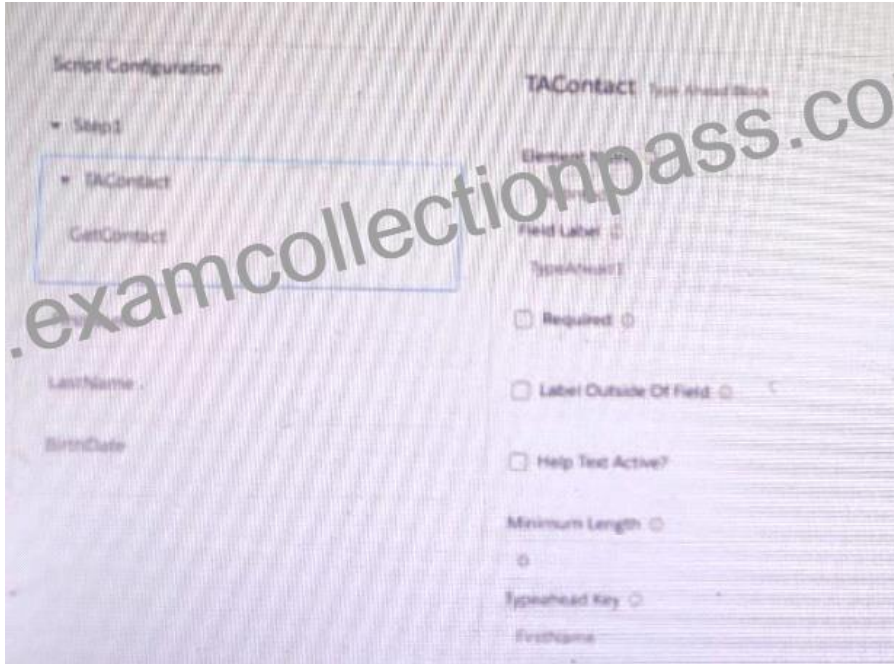

A developer creates an OmniScript display FirstName, LastName, and BirthDate of a contact using a Type Ahead Block. The DataRaptor used in the Type Ahead has been tested and fetches the correct data.

When previewing Omniscript, the developer enters a name in the Type Ahead and makes a selection of a contact from the list. However, the text fields FirstName, LastName, and BirthDate are not getting populated with the data.

What is the reason that the fields fail to display the fetched data?

- * Lookup Mode is not selected in the properties of the Type A Head Block.
- * Use Data JSON is not selected in the properties of the Type Ahead Block.
- * FirstName, LastName, and BirthDate are not placed inside the Type ahead Block.
- * The Typeghead ley is not in the correct format

NO.43 A developer need to use the CONTIF function to process data entered by the user in an OmniScript. The output of the function needs to be displayed to the user immediately in the current step.

Based on best practice, what element should the developer use this function in?

- * A Calculation Action element
- * A Set Values element
- * A formula element

* A Range element

NO.44 An integration procedure contains a Remote Action element that calls a method of an APEX class. The method requires two fields are input: AccountId and ProductId. The integration Procedure data JSON contains the following nodes:

How should the Remote Action element be configured to pass the data correctly to the method?

* Check the Send Only Additional Input checkbox, and the following/ value pairs to Additional input:

```
* AccountId: %AccountId%  
* ProductId: %Details:ProductId%
```

* Set Return Only Additional Output to true, and add the following Key/Value pairs to additional input.

```
* AccountId: %AccountId%  
* ProductId: %Details:ProductId%
```

* Check the DataRaptor Transform checkbox, and add the following Key/Value pairs to Output JSON Path:

```
* AccountId: %AccountId%  
* ProductId: %Details:ProductId%
```

* Add the following to Send JSON Path: accountId: %Accountd% ProductId% Details Products%

NO.45 A developer needs to configure a DataRaptor to retrieve data from a single object. The structure of the output data does not need to be changed.

Following best practices, which type of DataRaptor should the developer use?

- * DataRaptor Transform
- * DataRaptor Extract
- * DataRaptor Load
- * DataRaptor Turbo Extract

NO.46 A healthcare company wants to enable its subscribers to add, edit, or delete dependents related to their policy Community portal. The developer on the project decides to use an MiniScript.

How should the developer configure the OmniScript to provide this functionality?

- * Use an Edit Block element configured with Remote Actions.
- * Use an Edit Block element configured with SOQL statements.
- * Use an Input Block element and a DataRaptor Post Action element.
- * Use a Text Block element and a Remote Action element.

NO.47 A developer is creating a FlexCard and needs to display additional information using a Flyout.

Which two types of components can the developer embed in the flyout?

Choose 2 answer


- * An OmniScript
- * An Integration Procedure
- * A DataRaptor
- * A Child FlexCard

NO.48 A developer creates a FlexCard with five state elements. For of the states have a condition. To test the FlexCard, the developer previews it using sample data that causes two of the states to have true conditions.

In this scenario, how will the developer know which state will display?

- * The first state with true conditions sequence closest to the top of the FlexCard canvas will display.
- * The first state with true nested condition, regardless of sequence in the FlexCard canvas, will display
- * The state sequenced first in the FlexCard canvas will display.
- * The first state with a true AND condition, regardless of sequence in the FlexCard canvas, will display.

NO.49 Refer to the exhibit.

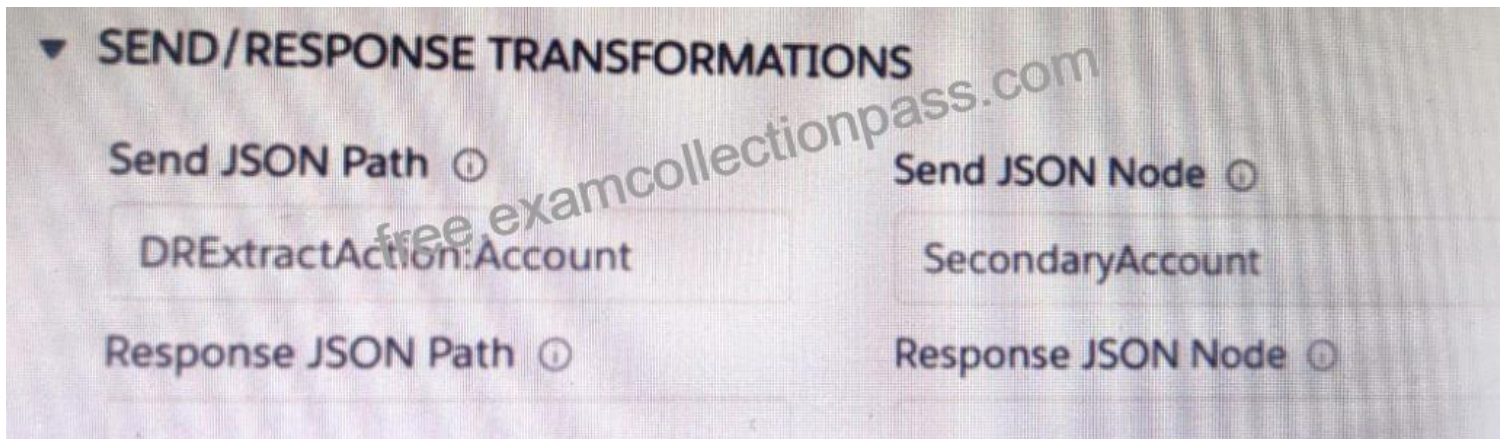

A developer has configured an integration Procedure element with SEND/RESPONSE TRANSFORMATIONS as shown.

Alternatively, how could the developer configure Additional input to send exactly the same data? Assume that the developer checked Send Only Additional input.

A)

Key	Value
SecondaryAccount	{DRExtractAction:Account}

B)


Key	Value
DRExtractAction:Account	SecondaryAccount

C)

Key	Value
{DRExtractAction:Account}	SecondaryAccount

- * Option A
- * Option B
- * Option C

NO.50 Refer to the exhibit below. What is the marge code needed for this integration procedure structure to pass a CaseNumber node from the DRReadCase DataRaptor Extract Action to the HTTP Action's HTTP URL?

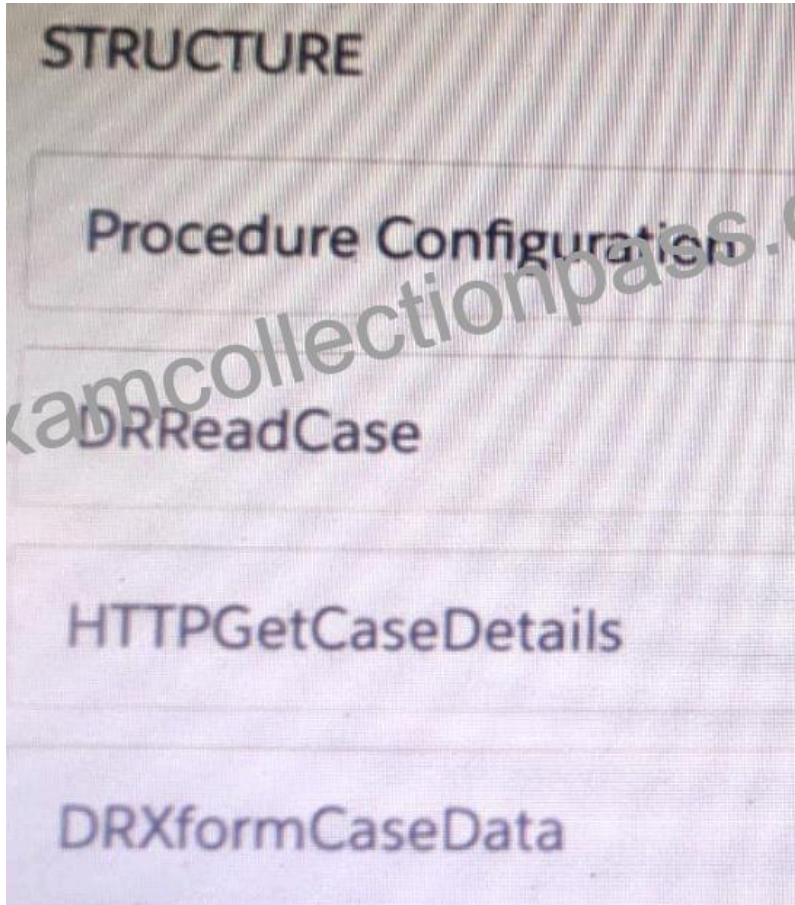

- * %DRReadCase: CaseNumber%
- * ((DRRCase, CaseNumber))
- * MTTOPDetCaseDetail: CaseNumber%
- * ((CaseNumber))

NO.51 A developer creates an OmniScript to update billing information. After analyzing the different types of customer interactions that occur at the company, the developer determines updating billing information should be included in the majority of customer interactions, which are represented by more than 20 different FlexCards.

What is the most efficient way for the developer to configure the action that invokes the OmniScript?

- * As an OS Action
- * As a Custom Action
- * As an OmniStudio Action
- * As a Lightning Action

NO.52 A developer builds a new OmniScript. It contains a Set Values element with a ContextId key/value pair that was used during

testing.

What should the developer do before moving the OmniScript to a production org?

- * Update the ContextId value to specify an id from the Production org.
- * Add a Show/Hide condition on the Set Values element.
- * Delete or Deactivate the Set Values element.
- * Deactivate the contextId key/value pair

NO.53 A developer has a requirement to create a child FlexCard that contain all of its parent FlexCard's records in a Datatable.

- * {Records[0]}
- * {Records}
- * {Params records}
- * {recordId}

NO.54 A developer examines data received from an external data source. The data is nested two levels down in the JSON structure.

Which OmniStudio tool could the developer use to simplify this data?

- * A guided workflow
- * A DataRaptor Transform
- * An HTTP Action Element
- * An integration Procedure

Verified OMS-435 Exam Dumps Q&As - Provide OMS-435 with Correct Answers:

<https://www.examcollectionpass.com/Salesforce/OMS-435-practice-exam-dumps.html>