


## AD0-E116 Exam Questions - Real & Updated Questions PDF [Q43-Q60]

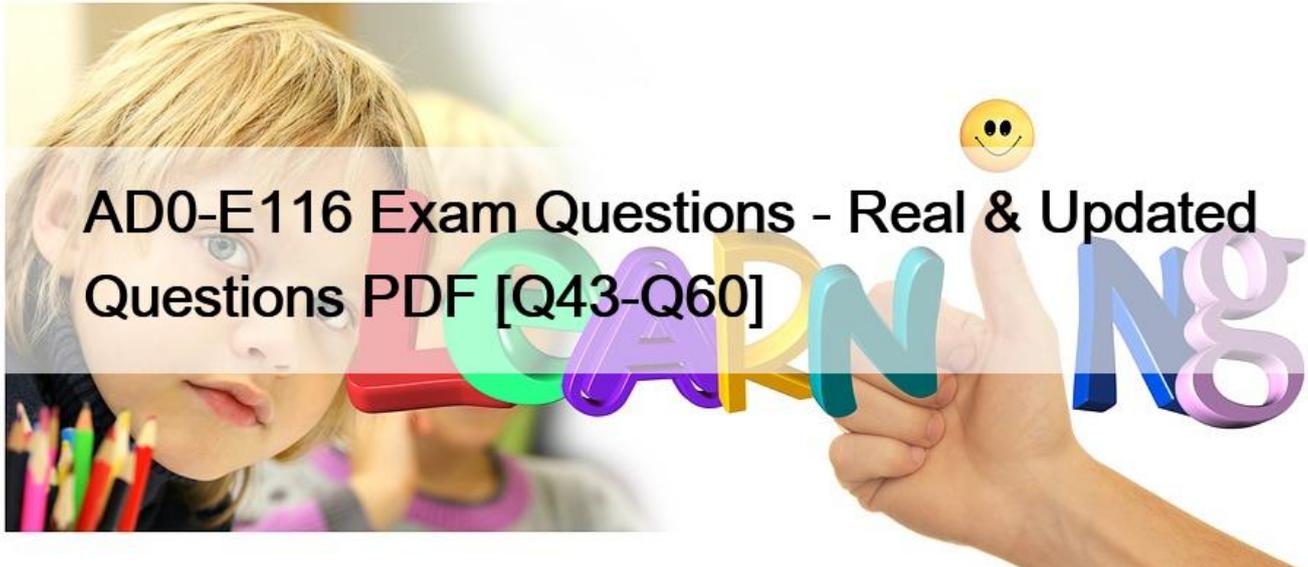

AD0-E116 Exam Questions - Real & Updated Questions PDF  
Pass Guaranteed Quiz 2022 Realistic Verified Free Adobe

How long does it take to get the certification?

There are other requirements that need to be met before one can obtain this certification such as passing other certifications such as XMPP, Java, and HTML5. If one does not meet all of these requirements, then the testing process for this certification may take longer than usual since you will not be able to qualify for quick certification.

### NEW QUESTION 43

There are performance, stability, and security issues with an installed AEM instance.

What should a developer do to fix these issues?

- \* Delete and reinstall the AEM instance.
- \* Install Adobe-provided Apache configuration file.
- \* Stop, clear cache files, and restart the AEM instance.
- \* Install service pack updates from package share.

### NEW QUESTION 44

A developer is working on the following Sling Model that is being used in a component.

```
@Model(adaptables = SlingHttpServletRequest.class, defaultInjectionStrategy = DefaultInjectionStrategy.OPTIONAL) public class SampleModel {
```

@Inject

```
private Page currentPage;
```

```
private boolean matchingTitle;
```

@PostConstruct

```
private void init(){
```

```
    matchingTitle = title.equals(currentPage.getName());
```

```
}
```

```
public boolean isMatchingTitle(){
```

```
    return matchingTitle;
```

```
}
```

```
}
```

The model must check if the configured value of the jct:title property for the component matches the same name of the current page. If the jcr:title property of the component has NOT been configured, then isMatchingTitle() must return false.

How should the developer inject the title property in this model?

\* `&#8220;@ValueMapValue`

\* `@Via(&#8220;&#8221;jcr:title&#8221;&#8221;)`

@Required

```
private String title;&#8221;
```

\* `&#8220;@ValueMapValue`

\* `@Named(&#8220;&#8221;jcr:title&#8221;&#8221;)`

\* `@Default(values = &#8220;&#8221;&#8221;&#8221;)`

```
private String title;&#8221;
```

\* `&#8220;@ValueMapValue`

\* `@Named(&#8220;&#8221;jcr:title&#8221;&#8221;)`

@Required

```
private String title;&#8221;
```

\* `&#8220;@ValueMapValue`

\* `@Via(&#8220;&#8221;jcr:title&#8221;&#8221;)`

```
@Default(values = {&#8220;&#8221;&#8221;&#8221;&#8221;);
```

```
private String title;&#8221;
```

#### NEW QUESTION 45

A custom AEM application is using the PageManager API.

What should a developer add to make the application compile and run correctly in AEM?

- \* a maven dependency to AEM uber-jar to the content package
- \* a maven dependency to bundle cq-wcm-core to the application bundle
- \* a maven dependency to AEM uber-jar to the application bundle
- \* a maven dependency to bundle cq-wcm-api to the content package

#### NEW QUESTION 46

A developer has a component named foobar with the following file:

FooBar.java

```
import com.adobe.cq.sightly.WCMUsePojo;

public class FooBar extends WCMUsePojo {

    @Override

    public void activate() throws Exception {}

    public String getLink() {

        return &#8220;http://www.foo&#8217;bar.com&#8221;;

    }

    public String getText() {

        return &#8220;foo&#8217;bar&#8221;;

    }

}
```

foobar.html

```
<div data-sly-use.fooBar=&#8221;FooBar&#8221;>

<a href=&#8221;${fooBar.link}&#8221; title=&#8221;${fooBar.text}&#8221;>

${fooBar.text}
```

</a>

</div>

What is the output when the component is rendered?

\* `<div>`

`<a href="https://www.foo%27bar.com"; title="foo&#39;bar";>`

`foo&#39;bar`

</a>

</div>&#8221;

\* `<div>`

`<a href="https://www.foo%27bar.com"; title="foo&#39;bar";>`

`foo&#8217;bar`

</a>

</div>&#8221;

\* `<div>`

`<a href="https://www.foo&#39;bar.com"; title="foo&#39;bar";>`

`foo&#39;bar`

</a>

</div>&#8221;

\* `<div>`

`<a href="https://www.foo%27bar.com"; title="foo&#39;bar";>`

`foo&#39;bar`

</a>

</div>&#8221;

## NEW QUESTION 47

AEM is installed in \$AEM\_HOME.

In which subfolder are the command line startup and shutdown scripts located?

\* \$AEM\_HOME/

\* \$AEM\_HOME/crx-quickstart/scripts

- \* \$AEM\_HOME/crx-quickstart/opt/
- \* \$AEM\_HOME/crx-quickstart/bin/

#### NEW QUESTION 48

A developer is working on a dialog for a contact list component. The dialog has the following requirements:

1. The list of contacts must include one or more entries.
2. Contact details must include a full name.
3. Contact details must include an email address
4. Contact details can optionally include a short bio
5. Authors need to be able to rearrange the contacts in the list

Which dialog configuration should the developer use to meet all of these requirements?

A

```
+ multi
- sling:resourceType="granite/ui/components/coral/foundation/form/multi-field"
- composite="{Boolean}true"
- fieldLabel="Contact List"
+ field
- sling:resourceType="granite/ui/components/coral/foundation/container"
- name="./contacts"
+ items
+ name
- sling:resourceType="granite/ui/components/coral/foundation/form/textfield"
- fieldLabel="Full Name"
- name="./name"
+ email
- sling:resourceType="granite/ui/components/coral/foundation/form/textfield"
- fieldLabel="Email Address"
- name"./email"
+ bio
- sling:resourceType="granite/ui/components/coral/foundation/form/textarea"
- fieldLabel="Short Bio"
- name"./bio"
- required="{Boolean}false"
```

B

```
+ multi
- sling:resourceType="granite/ui/components/coral/foundation/form/multifield"
- composite="{Boolean}true"
- fieldLabel="Contact List"
- required="{Boolean}true"
+ field
- sling:resourceType="granite/ui/components/coral/foundation/container"
- name="/contacts"
+ items
+ name
- sling:resourceType="granite/ui/components/coral/foundation/form/textfield"
- fieldLabel="Full Name"
- name="/name"
- required="{Boolean}true"
+ email
- sling:resourceType="granite/ui/components/coral/foundation/form/textfield"
- fieldLabel="Email Address"
- name="/email"
- required="{Boolean}true"
+ bio
- sling:resourceType="granite/ui/components/coral/foundation/form/textarea"
- fieldLabel="Short Bio"
- name="/bio"
```

C

```
+ multi
- sling:resourceType="granite/ui/components/coral/foundation/form/multifield"
- fieldLabel="Contact List"
- required="{Boolean}true"
+ field
- sling:resourceType="granite/ui/components/coral/foundation/container"
- composite="{Boolean}true"
- name="/contacts"
+ items
+ name
- sling:resourceType="granite/ui/components/coral/foundation/form/textfield"
- fieldLabel="Full Name"
- name="/name"
- required="{Boolean}true"
+ email
- sling:resourceType="granite/ui/components/coral/foundation/form/textfield"
- fieldLabel="Email Address"
- name="/email"
- required="{Boolean}true"
+ bio
- sling:resourceType="granite/ui/components/coral/foundation/form/textarea"
- fieldLabel="Short Bio"
- name="/bio"
```

D

```
+ multi
- sling:resourceType="granite/ui/components/coral/foundation/form/multiField"
- fieldLabel="Contact List"
+ field
- sling:resourceType="granite/ui/components/coral/foundation/container"
- composite="{Boolean}true"
- name="./contacts"
+ items
+ name
- sling:resourceType="granite/ui/components/coral/foundation/form/textfield"
- fieldLabel="Full Name"
- name="./name"
+ email
- sling:resourceType="granite/ui/components/coral/foundation/form/textfield"
- fieldLabel="Email Address"
- name="./email"
+ bio
- sling:resourceType="granite/ui/components/coral/foundation/form/textarea"
- fieldLabel="Short Bio"
- name="./bio"
- required="{Boolean}false"
```

- \* Option A
- \* Option B
- \* Option C
- \* Option D

#### NEW QUESTION 49

How should a developer enable remote debugging of an AEM server without modifying the AEM start script?

- \* Enable the remote debugging service through the AEM Cloud Services menu.
- \* Rename the quickstart jar file to include the additional debug settings.
- \* Enable the remote debugging service through the AEM Web Console.
- \* Include an additional JVM parameter when starting AEM with java -jar.

#### NEW QUESTION 50

A developer developed a workflow that makes a copy of every node created or modified under a certain path to a different one. The workflow launches but the nodes are not copied over.

Which two methods should the developer use to resolve this issue? (Choose two.)

- \* Go to Workflow Failures screen and check if any instances of the workflow are present.
- \* Go to Workflow instances screen and verify that the instance of the workflow is present and check its status.
- \* Go to Package Manager screen and reinstall the bundle that contains the workflow so it restarts.
- \* Go to Workflow Models screen, then delete and recreate the workflow.
- \* Go to Workflow Launchers and create a new launcher for the workflow even if one already exists.

#### NEW QUESTION 51

Which environment variable in the AEM start script should a developer modify to enable remote debugging?

- \* CQ\_RUNMODE
- \* CQ\_JVM\_OPTS
- \* CQ\_PORT
- \* CQ\_HOST

### NEW QUESTION 52

A developer needs to upgrade existing components (Proxy Components) based on Core Components Version 1(v1) to Core Components Version 2(v2).

How should the developer upgrade to V2 Core Components?

- \* Proxy Components will be automatically upgraded to the V2 Core Component on AEM Restart
- \* Modify the sling:resourceSuperType property on the V1 core components to point to V2 Component
- \* Modify the sling:resourceSuperType property on the proxy component to point to V2 Component
- \* Create a new Proxy Component and set sling:resourceType property to V2 Core Component

### NEW QUESTION 53

One content package of a custom application contains the following content paths.

```
/apps/myproj/install  
/apps/myproj/components  
/apps/myproj/i18n
```

The server also contains the content path /apps/myproj/configuration that must NOT be touched when installing the package.

Which two filter definitions should a developer use to always update only the contained paths upon installation in the server?  
(Choose two.)

A

```
<filter root="/apps/myproj">  
  <exclude pattern="configuration.*"/>  
</filter>
```

B

```
<filter root="/apps/myproj">  
  <include pattern=".*"/>  
  <exclude pattern="configuration.*"/>  
</filter>
```

```
<filter root="/apps/myproj">  
  <exclude pattern="/apps/myproj/configuration.*"/>  
</filter>
```

D

```
<filter root="/apps/myproj" mode="merge">
```

E

```
<filter root="/apps/myproj">  
  <include pattern="/apps/myproj/(install|components|i18n).*/>  
</filter>
```

- \* Option A
- \* Option B
- \* Option C
- \* Option D
- \* Option E

#### NEW QUESTION 54

Refer to the following Client Library node structure.

+clientlibs

&#8211; jcr:primaryType=&#8221;cq:ClientLibraryFolder&#8221;

&#8211; categories=&#8221;[clientlibs.example]&#8221;

+ js.txt

&#8211; jcr:primaryType=&#8221;nt:file&#8221;

+ css.txt

&#8211; jcr:primaryType=&#8221;nt:file&#8221;

+ js

&#8211; jcr:primaryType=&#8221;nt:folder&#8221;

&#8211; javascript1.js

&#8211; javascript2.js

The js.txt looks like

javascript1.js

javascript2.js

The JavaScript is NOT present in the Client Library when it is loaded.

What should a developer do to resolve this issue?

- \* Change the js folder to a Client Library node and add the property categories = &#8220;[clientlibs.example]&#8221;
- \* Change the js folder to a Client Library node and embed it on the clientlibs node
- \* Add #base=js as the first line in the js.txt file
- \* Split the js and css into 2 Client Libraries since they can&#8217;t be in the same Client Library

## NEW QUESTION 55

The structure section of an editable template has a locked component.

What happens to the content of that component when a developer unlocks it?

- \* The content stays in the same place but it ignored on pages using the template.
- \* The content is deleted after confirmation from the template author.
- \* The content is moved to the initial section of the editable template.
- \* The content is copied to the initial section of the editable template.

## NEW QUESTION 56

In which maven build phase is the content package assembled?

- \* install
- \* compile
- \* package
- \* deploy

## NEW QUESTION 57

A developer needs an existing workflow to run only when pages are created under a certain folder.

What should the developer create to achieve this?

- \* A Launcher with the field path pointing to the folder and condition field and have the value jcr:content/jcr:primaryType==cq:Page
- \* A Launcher with the field condition that has the value jcr:content/page
- \* A Launcher with the field exclude that has the value jcr:nodeType==cq:Page
- \* A Launcher with the field path pointing to the folder and nodetype field have the value cq:Page

### NEW QUESTION 58

Which log file contains AEM application request and response entries?

- \* response.log
- \* request.log
- \* history.log
- \* audit.log

### NEW QUESTION 59

A service component periodically retrieves content from an external REST interface and saves the information in JCR. The REST endpoint is configured via an OSGi service property. There is one URL for production (runmode prod) and another URL for all other environments.

How should a developer configure the OSGi service?

- \* Underneath /apps/<project>/settings, create the sub folders global and prod and node with name <PID>.conf each and configure the properties via node properties.
- \* Underneath /config/<project>/settings, create the sub folders config.default and config.prod and a file with the name <PID>.config each and list the properties as key value pairs in there.
- \* Underneath /apps/<project>, create the sub folders config and config.prod and a file with the name <PID>.config each and list the properties as key value pairs in there.
- \* Underneath /config/<project>/settings, create the sub folders config and config.prod and a file with the name <PID>.config each and list the properties as key value pairs in there.

### NEW QUESTION 60

A developer is working on a project locally and needs to install packages manually. The deployments to the localhost must be automated to speed up development. This functionality must be toggled on and off, depending on the needs of the developer.

Which step should the developer take to achieve this?

- \* Configure the maven install plugin by defining the target URL, username and password as maven properties.
- \* Add a maven profile and configure the content package maven plugin within this profile
- \* Write a script that does a PUT call to AEM each time maven builds a new package
- \* Run maven with the deploy phase. Maven will install the package on all local AEM instances running without further configuration

**Get to the Top with AD0-E116 Practice Exam Questions:**

<https://www.examcollectionpass.com/Adobe/AD0-E116-practice-exam-dumps.html>